

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
20 March 2003 (20.03.2003)

PCT

(10) International Publication Number
WO 03/022388 A2

- (51) International Patent Classification⁷: **B01D** Marc [US/US]; 149 Broadway, Wakefield, MA 01880 (US). STANKOWSKI, Ralph, J. [US/US]; 18 Boutwell Hill Road, Westford, MA 01886 (US). SMITH, Joseph, E. [US/US]; 30 Penni Lane, N. Andover, MA 01845 (US).
- (21) International Application Number: PCT/US02/29107
- (22) International Filing Date:
13 September 2002 (13.09.2002) (74) Agent: KING, Timothy, J.; Mykropolis Corporation, 129 Concord Road, Billerica, MA 01821-4600 (US).
- (25) Filing Language: English (81) Designated States (*national*): CN, JP, KR, SG, US.
- (26) Publication Language: English (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).
- (30) Priority Data:
60/332,002 13 September 2001 (13.09.2001) US
- (71) Applicant: MYKROLIS CORPORATION [US/US]; 129 Concord Road, Billerica, MA 01821-4600 (US). Published:
— without international search report and to be republished upon receipt of that report
- (71) Applicants and (72) Inventors: NIERMEYER, Karl, J. [US/US]; 52 Groton Road, Tyngsboro, MA 01879 (US). LAVERDIERE, For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 03/022388 A2

(54) Title: SEPARATION MODULE

(57) Abstract: A separation module is provided having a housing, a filter within the housing and at least one outlet and one inlet. The outlet and inlet are positioned to mate with fittings of a pump housing. A stationary receptor positioned between the pump housing and the separation module has a pivot line and two shelves on its outer surface which permit fitting the separation module in a stationary receptor adjacent the pump housing.

SEPARATION MODULE

BACKGROUND OF THE INVENTION

This invention relates to a separation module for purifying a fluid. Fluid separation devices having an easily replaceable and disposable fluid separation module have been used to control contamination in industrial processes for many years. Such devices are an integral part of the manufacture of many products including

5 pharmaceuticals, food stuffs and beverages. However, nowhere is the need for effective contamination control greater than in the semiconductor fabrication industry. With circuit details in the submicron range and with further feature size reductions inevitable, the need for control of particulate, ionic, organic and other contaminants in the semiconductor process fluids is essential. Also, because semiconductor devices are fabricated in clean

10 rooms, it is important to minimize the potential of contaminating the manufacturing environment. For this reason, disposable fluid separation devices are preferable in semiconductor fabrication processes in order to minimize contamination of the process lines as well as the clean room.

Examples of semiconductor process fluids which are processed at the point of use

15 (POU) include those chemicals used in photolithographic processing (photochemicals). Photochemicals include materials such as primers, adhesion promoters, photoresists, edge bead removers, antireflective coatings, developers, dielectrics, and the like. Such chemicals are commonly dispensed onto the silicon wafer by a specialized pump and subsequently dispersed into a uniform thin film using a process called spin coating. The

20 purity of these chemicals at the POU is essential to producing acceptable product yields.

Fluid separation devices are in general of two types. In the first type, the separation element such as a filter is a replaceable component, while the pressure vessel which houses the element, i.e., the housing, is reusable. The housing also contains appropriate fluid connections to the rest of the fluid processing system. Replacing the

25 fluid separation element requires opening the housing, removing the separation element, installing the replacement separation element into the housing and closing the housing. There are many disadvantages to this type of fluid separation device. First, the replacement operation is time consuming, especially if access to the housing is restricted. Secondly, because the housing contains a quantity of the fluid being processed and

because the fluid separation element is usually saturated with the fluid, spillage of the fluid usually occurs. In the case of the hazardous fluids, spills can be a threat to the well-being of personnel in the area as well as potentially damaging to nearby equipment and facilities. Finally, the opening of the housing exposes the internal surfaces of the fluid processing system to unwanted contamination from the surrounding environment.

The second type of separation device is one in which the separation element is permanently attached to the housing, which also contains appropriate fluid connections to the rest of the fluid processing system, to form an integrated module. In this case, replacement involves disconnecting the entire separation module from the fluid processing system and reconnecting a replacement module to the system. In this manner, replacement is easier, exposure of the operator to hazardous chemicals is minimized and the reliability of the connection is significantly improved. The type of separation device is referred to as a disposable module, since the whole module is removed and disposed of whenever the separation element requires replacement regardless of what connector design is employed. Disposable modules usually require that multiple connections be made sequentially, a minimum of two connections, and more typically three or four. Threaded fasteners are cumbersome and sometimes difficult to engage; factors which involve the subsequent consumption of additional time and effort. Furthermore, the module has to be held in place while the connections are being made, which makes the connection event even more difficult since it requires performing two actions at the same time (i.e., holding the module in place and attaching each connector sequentially). Finally, in those applications in which the permanent connections to the fluid processing system are not rigid, as for example, when flexible tubing is used, liquid has a tendency to be discharged as the connections disengage. All of these problems exacerbate the time and effort required to replace a disposable module, in addition to still allowing for exposure of personnel to hazardous materials, and contamination of the manufacturing environment.

For these reasons, some disposable separation modules have been designed with features that allow them to be connected quickly and easily to the fluid processing system in a "quick-connect" fashion. These types of quick-connect modules provide for a set of connectors that sealingly engage with a single, simple stroke or action, to a mating set of connectors attached to a reusable substrate. Different types of mechanisms have been

designed to accomplish quick-connect retention, all of which heretofore have required some form of relative motion between the male connector and its female counterpart, most commonly a twisting action.

It has also been proposed to provide a separation module in a system for
5 dispensing a filtered fluid composition wherein the separation module is introduced into a pivotable housing to effect a desired connection. The pivotable housing is expensive and is subjected to breakage over time due to excessive use.

Accordingly, it would be desirable to provide a separation module which can be replaced in a fluid separation system without the need of a pivotable housing.

10

SUMMARY OF THE INVENTION

The separation module of this invention fits into a stationary receptor having a shelf which functions as a pivot line and a slot which receives and retains a latch of the separation module. The separation module includes a curved surface which fits onto the
15 pivot line of the stationary receptor and a latch which cooperates with the slot of the stationary receptor to retain the separation module within the stationary receptor. The separation module includes a filter positioned within a housing of the separation module and fittings which connect a source of fluid to be purified to a point of use for the fluid being purified within the separation module. In one embodiment, the separation module
20 is positioned in a portable manifold having fluid fittings which permit the use of the separation module in fluid transfer systems having a variety of functions.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of a separation module of this invention.

25 Fig. 2 is a perspective view of a stationary receptor utilized in conjunction with the separation module of Fig. 1.

Fig. 3a, 3b, 3c and 3d are side view illustrating the use of a latch of the separation module of Fig. 1.

Fig. 4 is a side view of the separation module of Fig. 1 in the stationary receptor of
30 Fig. 2.

Fig. 5 is a perspective view of the apparatus of Fig. 4 attached to a pump housing.

Fig. 6 illustrates an alternative separation module of this invention.

Fig. 7 illustrates an alternative separation module of this invention.

Fig. 8 is a perspective view of a portable stationary module and separation module of this invention.

5

DESCRIPTION OF SPECIFIC EMBODIMENTS

The separation module of this invention is useful for purifying a fluid from a fluid dispensing system which includes a pump. The fluid dispensing system can include a single pump or a plurality of pumps such as a two pump system comprising a dispensing pump and a feed pump. Such a system, when dispensing a fluid, includes the separation module of this invention having a separation element which separates unwanted components of the fluid from the desired fluid composition.

The present invention will be particularly described herein with reference to a two pump fluid dispensing system including a feed pump, a dispensing pump and a separation module having a particular configuration of inlet means and outlet means. However, it is to be understood that the present invention can be utilized in a fluid dispensing system having a separation module regardless of the outer surface configuration of inlet means and outlet means on the surface of the separation module.

Referring to Fig. 1, the separation module 10 of this invention includes a housing 12 for a filter construction such as a pleated filter, a depth filter, hollow fibers or the like. Ports 14, 16 and 18 fit over mating fittings 15, 17 and 19 (Fig. 4). Housing 66 (Fig. 5) which contains a feed pump and a dispense pump such as that disclosed in U.S. Patent 5,263,069 which is incorporated herein by reference. Port 14 can be an inlet for fluid to be filtered. Port 16 can be an outlet for retentate. Port 18 can be an outlet for filtered fluid directed to a point of use. The separation module 10 includes a pivot surface 20 which extends substantially the complete width of the separation module 10 and two flanges 22 (one shown) which are positioned on opposing surfaces of the separation module 10 and which are attached to walls 24 and 26.

The separation module 10 is provided with a latch 31 having a vertical arm 32, a hook 33 and a lever 35. The latch 31 is secured to the separator module 10 such as by being molded with the walls of slot 37. The slot 37 permits movement of latch 31 when a force is applied to lever 35, such as manual force.

Referring to Fig. 2, the stationary receptor 36 includes a top surface 38 having

holes 40, 42 and 44 through which fittings 15, 17 and 19 (Fig. 4) from a manifold extend. The stationary receptor 36 includes a flange 46 having an opening 47 which cooperates with vertical arm 32 and hook 33 of latch 31. The stationary receptor 36 also includes shelves 50 and 52 onto which flanges 22 of separation module 10 slide, as well as
5 receptor pivot surface 54 onto which pivot surface 20 fits.

Referring to Figs. 3a, 3b, 3c and 3d, the latch 31 in its initial position is shown in Fig. 3a. As shown in Fig. 3b, a force in the direction of the arrow causes hook 33 to move away from flange 46. As shown in Fig. 3c, the latch 31 is moved upwardly by moving filtrate module 10 upwardly so that hook 33 fits onto flange 46. This latch position fixes
10 the filtration module 10 to stationary module 36. As shown in Fig. 3d, the hook 33 is removed from flange 46 by applying a force to lever 35 as shown by the arrow. When latch 31 in the position shown in Fig. 3d, separation module 10 can be removed from stationary receptor 36.

As shown in Figs. 2 and 4, separation module 10 is slid into stationary receptor 36
15 onto slides 50 and 52 until pivot line 20 is positioned on pivot surface 54. When separation module 10 is so positioned, ports 14, 16 and 18 are positioned to fit over fittings 15, 17 and 19 when separation module 10 is rotated upwardly as indicated by arrow 55. By virtue of this upward movement, arm 32 is locked onto flange 46 and hook 33 extends through opening 47. This, in turn, locks separation module 10 into stationary
20 receptor 36 so that leak-free fluid transfer can be affected between ports 14, 16 and 18 and fittings 15, 17 and 19.

As shown in Fig. 5, the stationary receptor 36 is attached to a pump housing containing one or a plurality of pumps in a manner well known in the art. The fittings 14, 16 and 18 are sealed to mating fittings such as described above.

25 As shown in Fig. 6, the separation module 10 can be provided with a latch 28 comprising two arms 30 and 31. Arm 31 is provided with lip 34 which cooperates with the bracket of Fig. 2 as described below. The arms 30 and 31 are sufficiently flexible so that the arm 31 can be pushed by arm 30, which in turn, is pushed manually sequentially in order to engage or remove arm 31 from contact with flange 46 of bracket 36 and
30 thereby to permit removal of separation module 10 from bracket 36.

An alternative embodiment of a separation module of this invention is shown in Fig. 7. The separation module 10a having ports 14a, 16a, and 18a also is provided with

two shelves 22 and a pivot line 20 in the manner described above with reference to Fig. 1.

The latch 70 includes a lip 72 and an arm 74. The lip 72 is configured to fit into a stationary receptor and the lever 74 permits application of manual force in order to remove lip 72 from the stationary receptor thereby to install and remove the separation
5 module 10a from the stationary receptor in the manner described above with reference to Figs. 3a -3d.

Referring to Fig. 8, an embodiment of this invention is illustrated which comprises a portable unit of a separation module 76 and the stationary receptor 78 that is portable. The separation module 76 and stationary receptor 78 are joined by latch 31 in the manner
10 described above with reference to Figs. 3a-3d. The stationary receptor 78 is provided with fittings 80, 82 and 84 which can be mated with a pumping apparatus (not shown). The stationary receptor 78 is joined to a mounting 88 that can be mounted to a wall 90 by a latch 92. This embodiment facilitates installation of stationary receptor 78. The stationary receptor 78 can include a valve 81 having a manually activated apparatus lever
15 83 for opening or closing the valve 81 to permit or prevent fluid transfer through fittings.

CLAIMS

1. A separation apparatus which comprises:
 - a housing having at least one inlet and at least one outlet,
 - a separation element sealed within said housing in fluid communication with said at least one inlet and said at least one outlet,
 - said housing having a pivot surface and a latch positioned to support said housing in a locked position of a receptor apparatus so that said at least one inlet and said at least one outlet are sealed in fluid communication with at least one complementary inlet and with at least one complementary outlet.
2. The separation module of claim 1 wherein said latch includes a lever to which force can be applied to open said latch.
3. A portable unit comprising the separation module of Claim 1 positioned with a stationary receptor shaped to receive said two flanges and pivot surfaces, said stationary receptor including a surface for receiving said latch in a locked position,
 - and said stationary receptor having at least two fittings which permits fluid transfer therethrough.
4. The separation module of claim 3 wherein said latch includes a lever to which force can be applied to open said latch.
5. The portable unit of claim 3 having at least 3 fittings.
6. The portable unit of claim 4 having at least 3 fittings.
7. The portable unit of any one of claims 3, 4, 5 or 6 which includes a valve which permits or prevents fluid transfer through said at least one fitting.

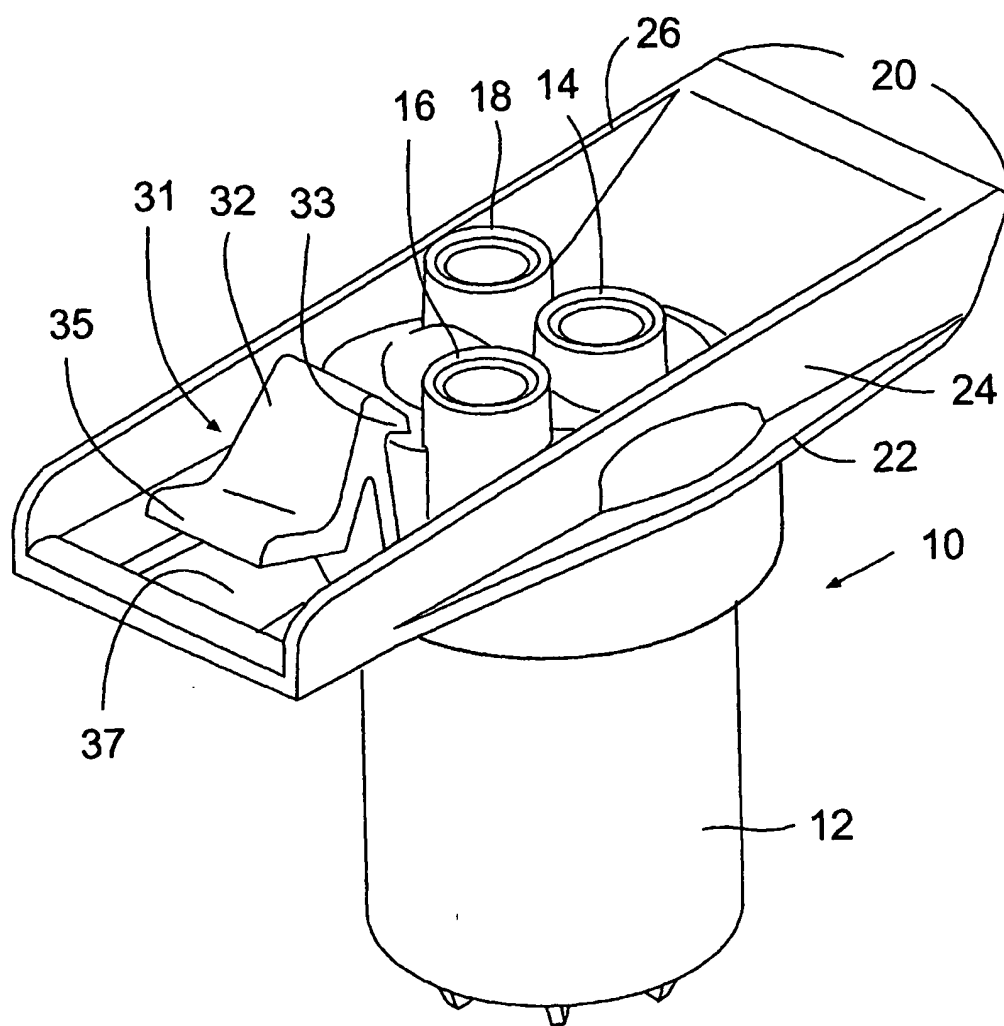


Fig. 1

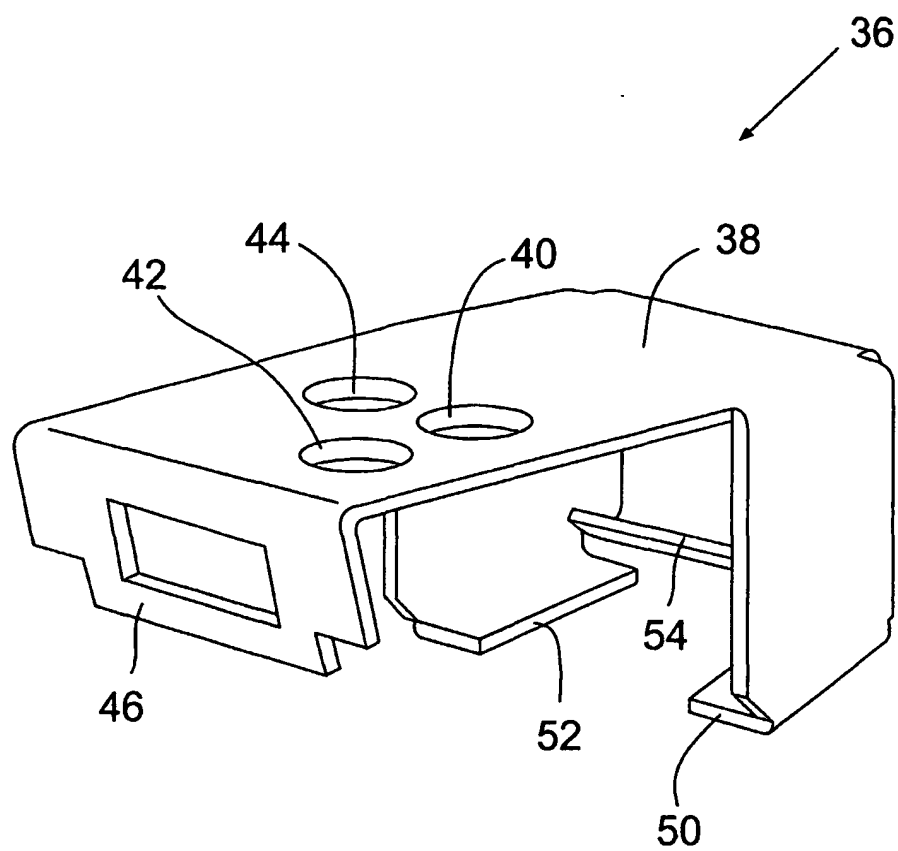


Fig. 2

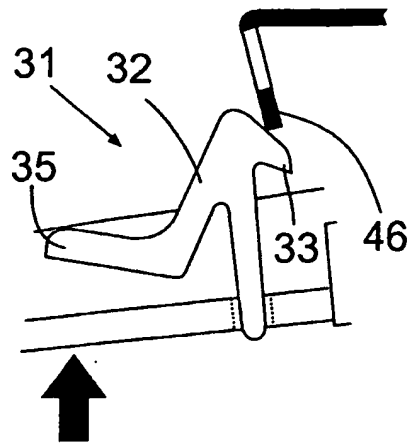


Fig. 3a

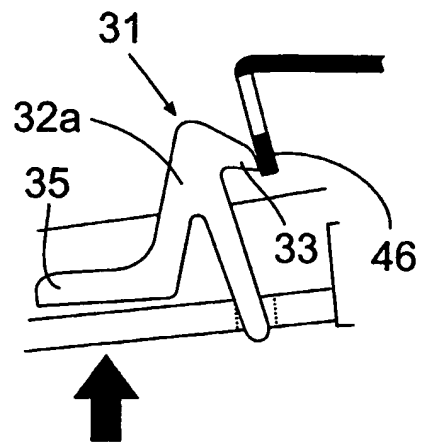


Fig. 3b

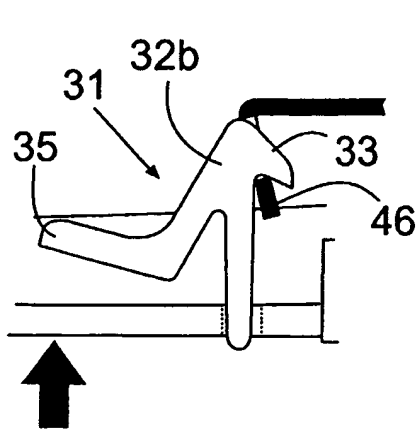


Fig. 3c

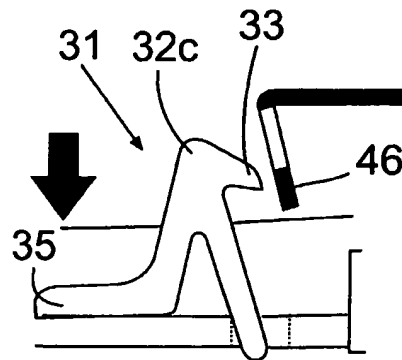


Fig. 3d

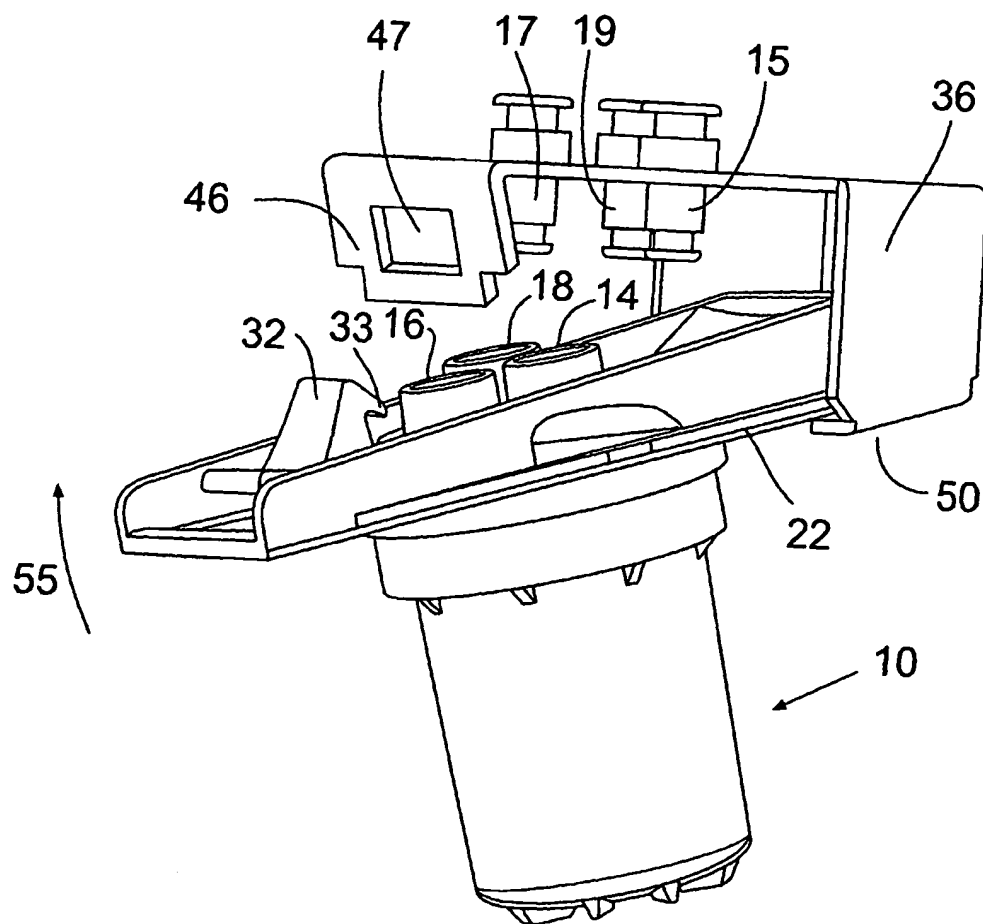


Fig. 4

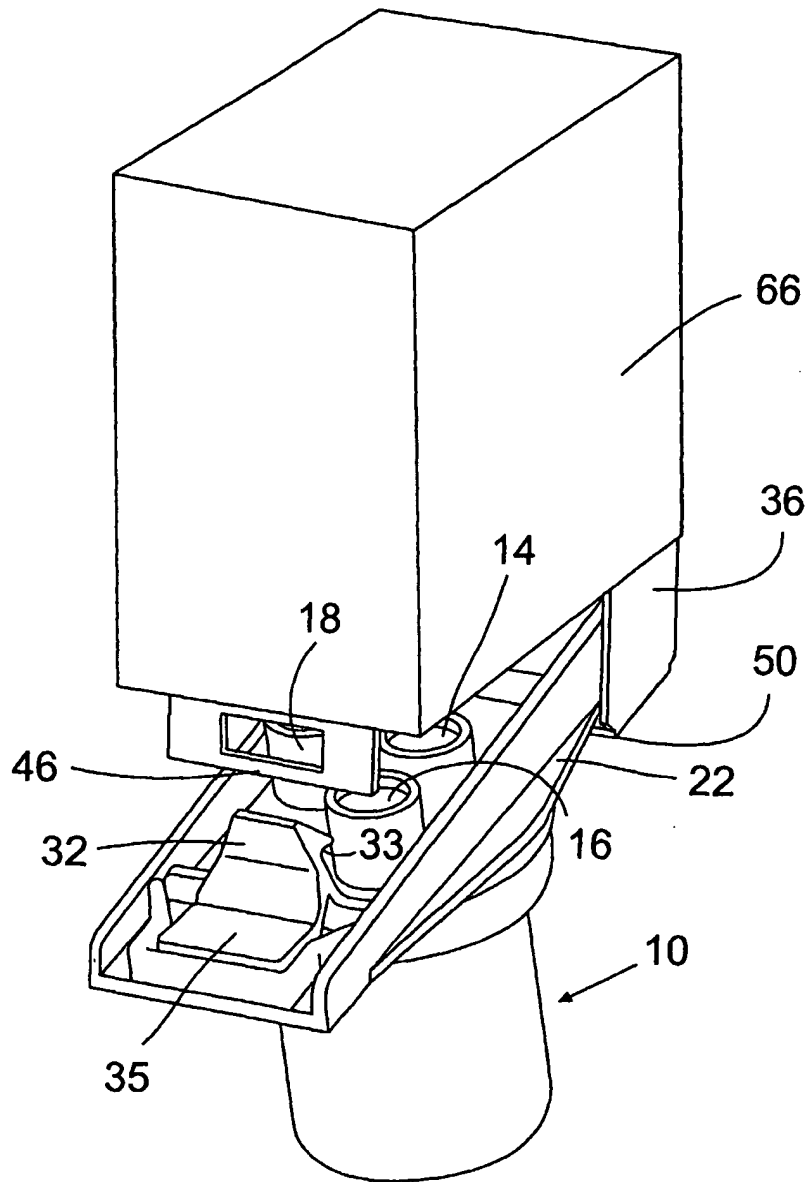


Fig. 5
5/8

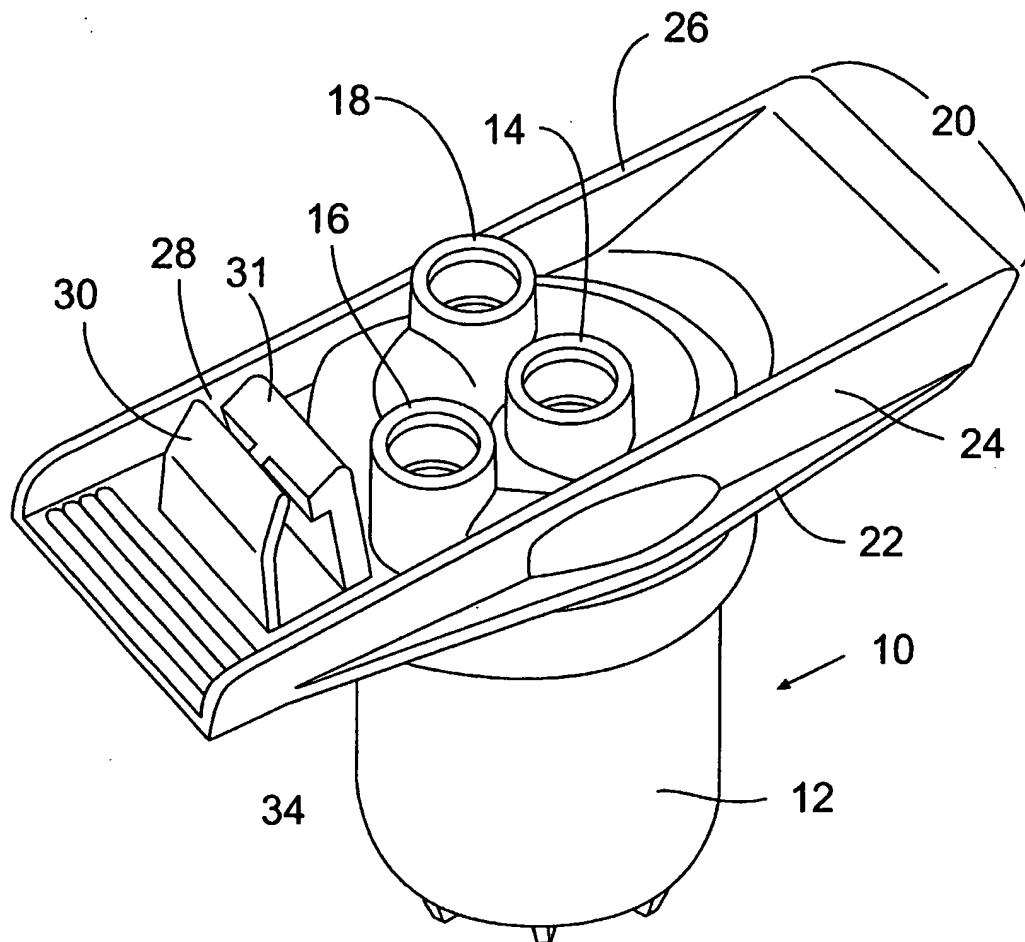


Fig. 6

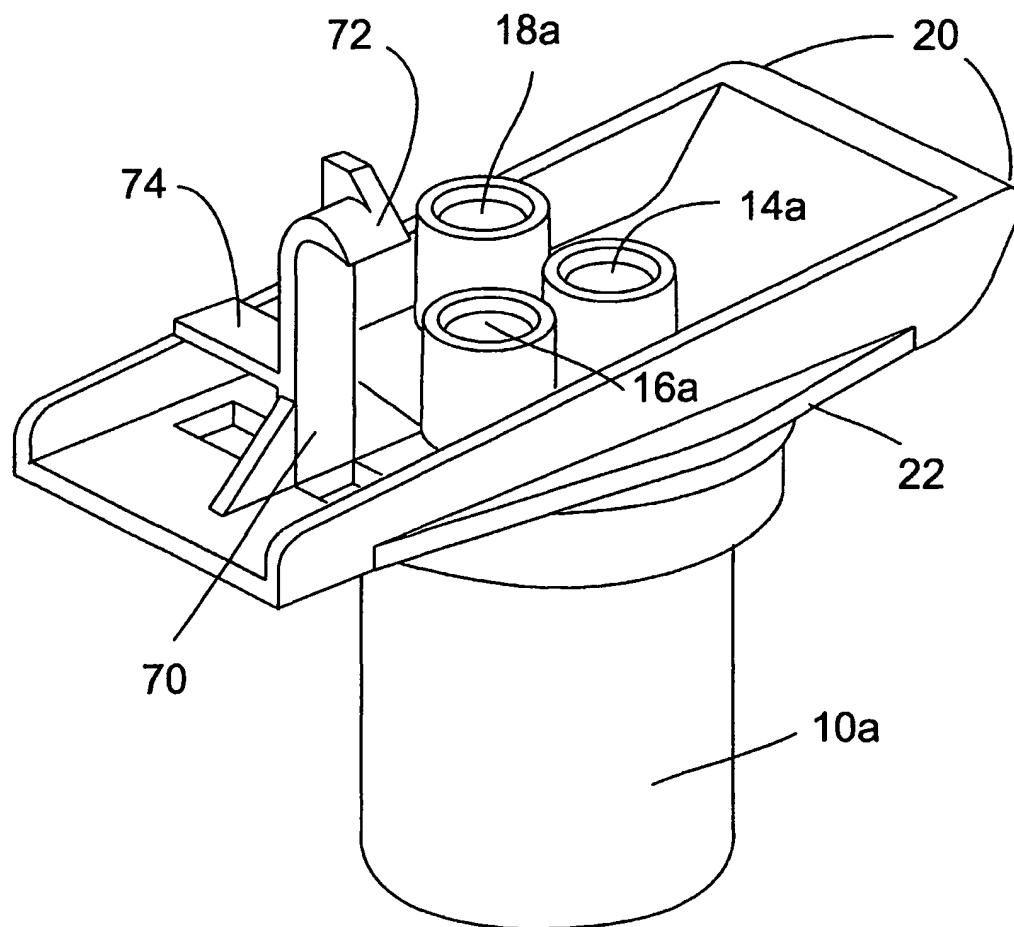


Fig. 7
7/8

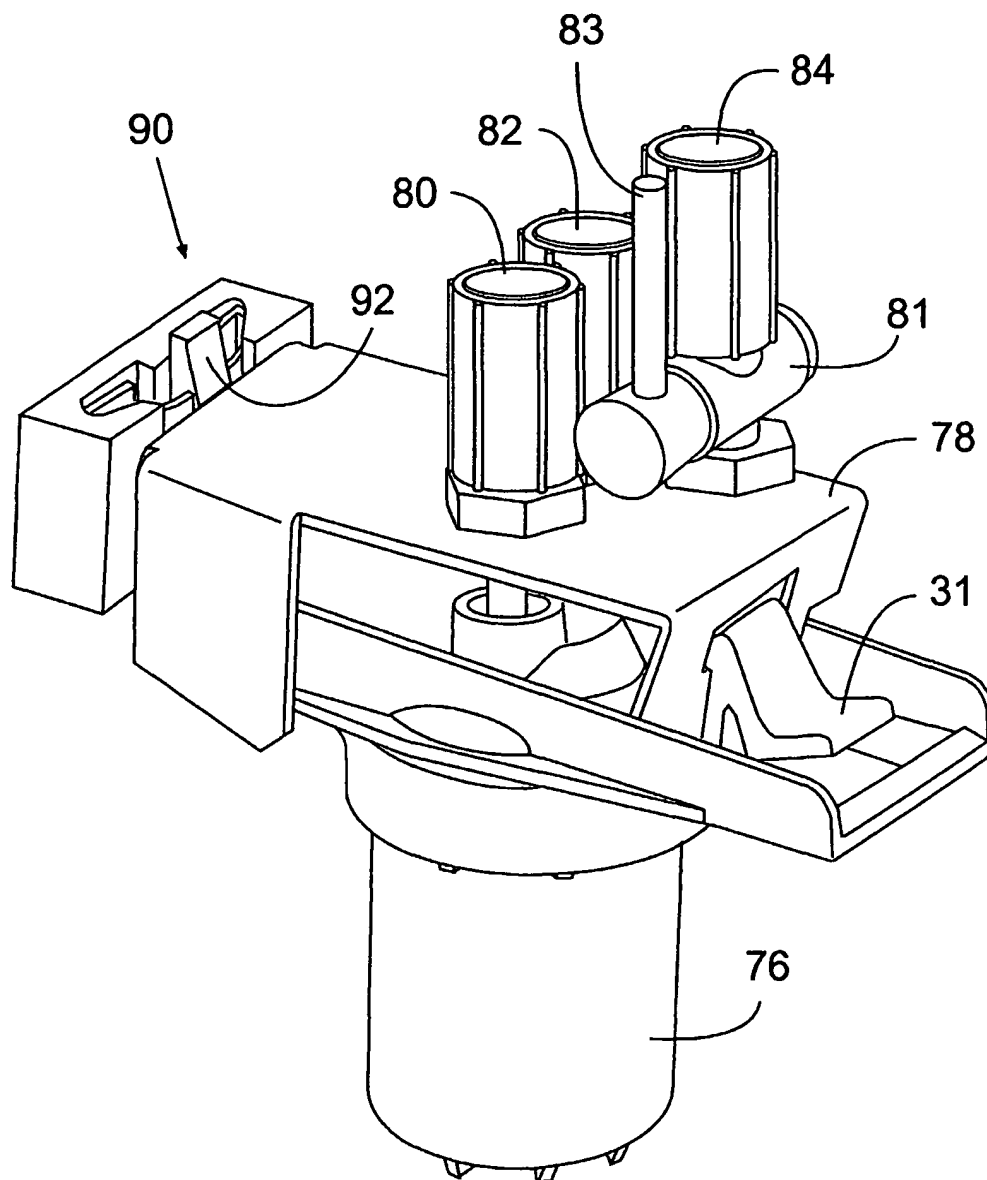


Fig. 8
8/8

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 March 2003 (20.03.2003)


PCT

(10) International Publication Number
WO 2003/022388 A3

- (51) International Patent Classification⁷: **F16L 39/00** (74) Agent: KING, Timothy, J.; Mykropolis Corporation, 129 Concord Road, Billerica, MA 01821-4600 (US).
- (21) International Application Number: PCT/US2002/029107 (81) Designated States (*national*): CN, JP, KR, SG, US.
- (22) International Filing Date: 13 September 2002 (13.09.2002) (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/332,002 13 September 2001 (13.09.2001) US
- (71) Applicant: MYKROLIS CORPORATION [US/US]; 129 Concord Road, Billerica, MA 01821-4600 (US).
- (71) Applicants and (88) Date of publication of the international search report: 24 June 2004
- (72) Inventors: NIERMEYER, Karl, J. [US/US]; 52 Groton Road, Tyngsboro, MA 01879 (US). LAVERDIERE, Marc [US/US]; 149 Broadway, Wakefield, MA 01880 (US). STANKOWSKI, Ralph, J. [US/US]; 18 Boutwell Hill Road, Westford, MA 01886 (US). SMITH, Joseph, E. [US/US]; 30 Penni Lane, N. Andover, MA 01845 (US).
- Published:*
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: SEPARATION MODULE

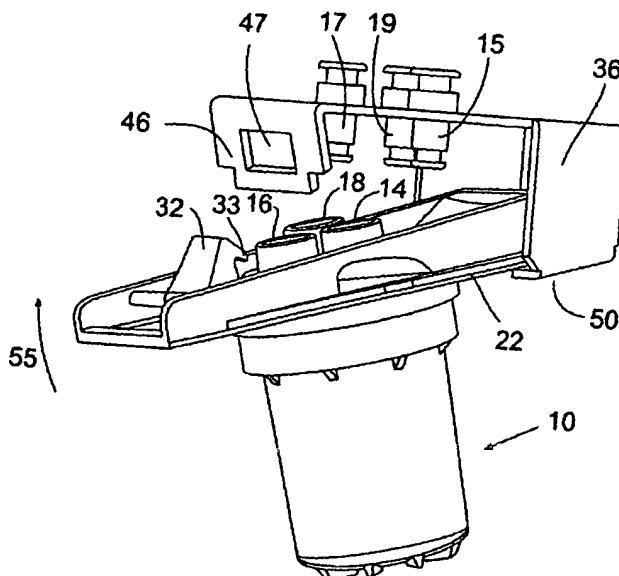

(57) Abstract: A separation module (10) is provided having a housing (12), a filter within the housing and at least one outlet and one inlet. The outlet (18) and inlet (14) are positioned to mate with fittings of a pump housing (66). A stationary receptor (36) positioned between the pump housing and the separation module has a pivot line (54) and two shelves (52, 50) on its outer surface which permit fitting the separation module (10) in a stationary receptor adjacent the pump housing (66).

Vol. 2003/022388 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/29107

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : F16L 39/00

US CL : 285/124.1; 210/238

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 285/124.1; 210/238

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6,378,907 B1 (CAMPBELL et al) 30 April 2002 (30.04.2002), figs. 1-6.	1-7
A	US 6,068,770 A (NIERMEYER et al.) 30 May 2000 (30.05.2000), figs. 1-6	1-7
A	US 5,383,690 A (NIEMEIER et al) 24 January 1995 (24.01.1995), figs. 1-3.	1-7
Y	US 4,857,189 A (THOMSEN et al) 15 August 1989 (15.08.1989), fig. 2.	7
X	US 4,806,240 A (GIORDANO et al) 21 February 1989 (21.02.1989) figs. 1-7.	1-6
—		
Y		7

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" documents published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 February 2004 (25.02.2004)

Date of mailing of the international search report

04 MAY 2004

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US

Commissioner for Patents

P.O. Box 1450

Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

David E. Bochna

Telephone No. (703) 308-2168

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 March 2003 (20.03.2003)

PCT

(10) International Publication Number
WO 2003/022388 A3

(51) International Patent Classification⁷: **F16L 39/00**

[US/US]; 18 Boutwell Hill Road, Westford, MA 01886 (US). SMITH, Joseph, E. [US/US]; 30 Penni Lane, N. Andover, MA 01845 (US).

(21) International Application Number:
PCT/US2002/029107

(22) International Filing Date:
13 September 2002 (13.09.2002)

(74) Agent: KING, Timothy, J.; Mykropolis Corporation, 129 Concord Road, Billerica, MA 01821-4600 (US).

(25) Filing Language: English

(81) Designated States (*national*): CN, JP, KR, SG, US.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).

(30) Priority Data:
60/332,002 13 September 2001 (13.09.2001) US

Published:
— with international search report

(71) Applicant (*for all designated States except US*): MYKROLIS CORPORATION [US/US]; 129 Concord Road, Billerica, MA 01821-4600 (US).

(88) Date of publication of the international search report:
24 June 2004

(72) Inventors; and


(48) Date of publication of this corrected version:
12 August 2004

(75) Inventors/Applicants (*for US only*): NIERMEYER, Karl, J. [US/US]; 52 Groton Road, Tyngsboro, MA 01879 (US). LAVERDIERE, Marc [US/US]; 149 Broadway, Wakefield, MA 01880 (US). STANKOWSKI, Ralph, J.

(15) Information about Correction:
see PCT Gazette No. 33/2004 of 12 August 2004, Section II

[Continued on next page]

(54) Title: SEPARATION MODULE

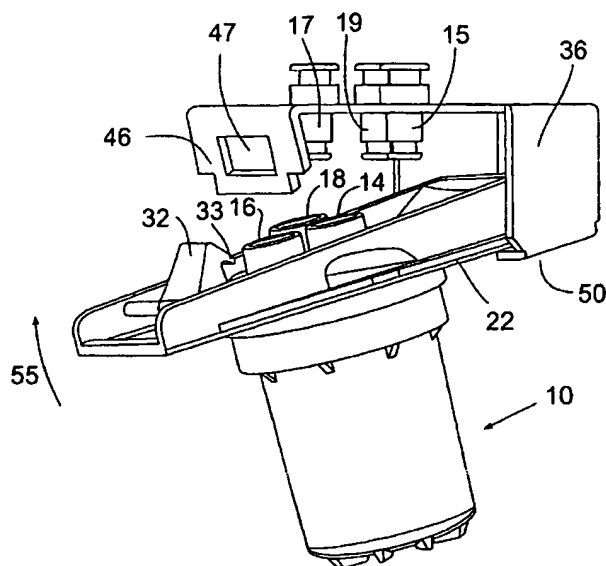

(57) Abstract: A separation module (10) is provided having a housing (12), a filter within the housing and at least one outlet and one inlet. The outlet (18) and inlet (14) are positioned to mate with fittings of a pump housing (66). A stationary receptor (36) positioned between the pump housing and the separation module has a pivot line (54) and two shelves (52, 50) on its outer surface which permit fitting the separation module (10) in a stationary receptor adjacent the pump housing (66).

WO 2003/022388 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.